



Technical Data Sheet

DOWSIL™ 888 Silicone Joint Sealant

FEATURES & BENEFITS

- Can be extruded from -20 to 120°F.
- May be used in joints that are not uniform in width.
- Movement capability 100% extension and 50% compression.
- Low modulus.
- Weather and UV resistant.
- Fuel resistant-short term exposure. Refer to Dow form number 62-207 for more information.
- One component, cold applied, ready-to-use as supplied; dispensed directly from the bulk container into the joint by hand or with an air-powered pump.
- Unprimed adhesion – primer is not required for bonding to Portland cement concrete. For optimum adhesion, the surface must be clean, dry and frost-free.
- Cure time – typically, the sealant will have a skin-over time of one hour or less at standard conditions.

COMPOSITION

- One-part, cold applied, non-sag silicone sealant.

Non-sag silicone joint sealant for Portland cement concrete pavement joints.

APPLICATIONS

- DOWSIL™ 888 Silicone Joint Sealant can be used for concrete to concrete pavement joints.
- For use in new construction, repair or remedial applications. DOWSIL 888 Silicone Joint Sealant may be used to seal joints that are not uniform in width provided the movement capability of the sealant is not exceeded. May also be used in joints with minor spalling.


TYPICAL PROPERTIES

Specification Writers: These values are not intended for use in preparing specifications.

Test* - Property	Result	D 5893 Requirement
As Supplied		
Color	Gray	
ASTM D 2202, Slump	Pass	< 0.30 inches
ASTM C 1183, Extrusion Rate, minimum	72 mL/min	20 mL/min
ASTM C 679, Tack Free Time	Pass	5 hours max
ASTM C 792, Heat Aging	3.05%	10% loss max
ASTM C 661, Durometer Shore A-2	15	25 maximum
ASTM C 792, Specific Gravity	1.48	
Cure Time, ½" x ½"x 2" (73°F, 50% R.H.)	Pass	21 day Cure
As Cured – 21 days at 25°C (77°F) and 50% RH		
Bond, Non-Immersed	Pass	No cracks or separation
Bond, Water Immersed	Pass	No cracks or separation
Bond, Oven Aged	Pass	No cracks or separation
ASTM D 412 (Die C), Ultimate Elongation	≥ 1000%	600% min
ASTM D 412 (Die C), Tensile Stress @ 150%	28 psi	45 psi max
ASTM C 793, Effects of Accelerate Weathering	Pass	5,000 hours
Resilience	77%	75% min
ASTM C719, Joint Movement Capability, +100/-50 percent, 10 cycles	No failure	

*ASTM: American Society for Testing and Materials.

Figure 1: Good Joint Design

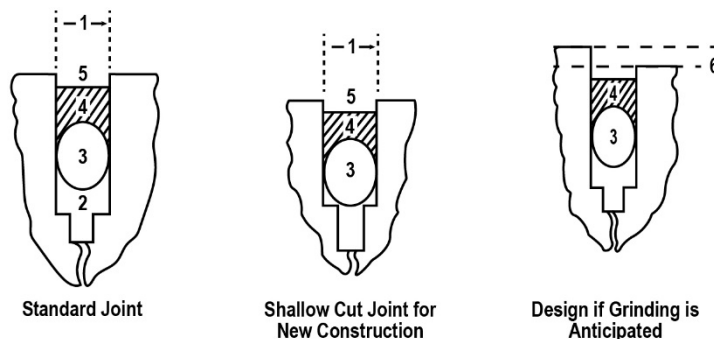

1. Joint width wide enough to accommodate movement. (For additional information on joint width, see papers by Spells and Klosowski, "Silicone Sealants for Use in Concrete Construction," Vol. 1, No. 1, American Concrete Institute, SP-70, 1981; J.B. Cook, "Construction Sealants and Adhesives," Wiley-Interscience, 1970; and J.M. Klosowski, "Sealants in Construction," Marcel Dekker, 1989.)
2. Joint sawed deep enough to allow backer rod/sealant placement and space for pumping of old sealant compounds. NOTE: This applies to standard joints only; void space beneath backer rod in new construction is not needed.
3. Proper backer rod placement to prevent three-sided adhesion.
4. Sealant installed to proper depth and width.
5. Sealant recessed a minimum of 3/8 inch to 1/2 inch (9.53 mm to 12.7 mm) below pavement surface.
6. Depth of lowest slab determines the amount of recess required if grinding is anticipated; once grinding is complete, the sealant will have proper recess below the pavement surface.

DESCRIPTION

DOWSIL 888 Silicone Joint Sealant is a one-part, non-sag silicone material that cures to a low-modulus silicone rubber upon exposure to atmospheric moisture. Can be applied over a wide temperature range.

APPLICABLE STANDARDS

- ASTM D 5893 Type NS
- FAA P-605 for silicone joint sealants
- Meets SS-S-200E (section 4.4.12) Flame Test Requirements
- EN 14187-5 Hydrolysis Test

HOW TO USE

Please refer to *the Dow Silicone Pavement Sealants Installation Guide*

HANDLING

PRECAUTIONS

PRODUCT SAFETY

INFORMATION REQUIRED FOR SAFE USE IS NOT INCLUDED IN THIS DOCUMENT. BEFORE HANDLING, READ PRODUCT

AND SAFETY DATA SHEETS AND CONTAINER LABELS FOR SAFE USE, PHYSICAL AND HEALTH HAZARD INFORMATION. THE SAFETY DATA SHEET IS AVAILABLE ON THE DOW WEBSITE AT WWW.CONSUMER.DOW.COM, OR FROM YOUR DOW SALES APPLICATION ENGINEER, OR DISTRIBUTOR, OR BY CALLING DOW CUSTOMER SERVICE.

USABLE LIFE AND STORAGE

Keep stored in original, unopened containers at or below 32°C (90°F). Refer to product packaging for "Use By" date. Keep containers tightly closed.

PACKAGING INFORMATION

DOWSIL 888 Silicone Joint Sealant is supplied in 29 fl oz (857 mL) disposable plastic cartridges, 4.5 gal (17 L) bulk pails, and 50 gal (189 L) bulk drums.

LIMITATIONS

DOWSIL 888 Silicone Joint Sealant is not recommended for continuous water immersion. It should not be applied in totally confined spaces where the sealant is not exposed to atmospheric moisture.

Not intended for use with asphalt.

The sealant should never be applied to wet or damp asphalt or concrete pavements or installed during inclement weather.

Dow does not promote or warrant the use of Dow sealants in applications associated with spill containment areas of any kind.

This product is neither tested nor represented as suitable for medical or pharmaceutical uses.

SHIPPING LIMITATIONS

None.

UNRESTRICTED – May be shared with anyone

®™ The DOW Diamond and DOWSIL are trademarks of The Dow Chemical Company

Semco® is a registered trademark of PRC-Desoto International, Inc.

UL® is a registered trademark of Underwriters Laboratories, Inc.

DOWSIL™ 888 Silicone Joint Sealant

© 2017 The Dow Chemical Company. All rights reserved.

HEALTH AND ENVIRONMENTAL INFORMATION

To support customers in their product safety needs, Dow has an extensive Product Stewardship organization and a team of product safety and regulatory compliance specialists available in each area.

For further information, please see our website, www.consumer.dow.com or consult your local Dow representative.

LIMITED WARRANTY INFORMATION – PLEASE READ CAREFULLY

The information contained herein is offered in good faith and is believed to be accurate. However, because

conditions and methods of use of our products are beyond our control, this information should not be used in substitution for customer’s tests to ensure that our products are safe, effective, and fully satisfactory for the intended end use. Suggestions of use shall not be taken as inducements to infringe any patent.

Dow’s sole warranty is that our products will meet the sales specifications in effect at the time of shipment.

Your exclusive remedy for breach of such warranty is limited to refund of purchase price or replacement of any product shown to be other than as warranted.

TO THE FULLEST EXTENT PERMITTED BY APPLICABLE LAW, DOW SPECIFICALLY DISCLAIMS ANY OTHER EXPRESS OR IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE OR MERCHANTABILITY.

DOW DISCLAIMS LIABILITY FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES.

www.consumer.dow.com

Table 1: Recommended Backer Rod Installation (Shallow Cut)¹

Measured in Inches						
Joint Width	1/4	3/8	1/2	3/4	1	> 1
Recessed Below Surface	3/8	3/8	3/8 to 1/2	3/8 to 1/2	1/2+	Contact Dow
Sealant Thickness	1/4	1/4	1/4	3/8	1/2	
Backer Rod Diameter	3/8	1/2	5/8	7/8	1 ¹ / ₄	
Total Joint Depth	1–1 ¹ / ₈	1 ¹ / ₈ –1 ¹ / ₄	1 ¹ / ₄ –1 ³ / ₈	1 ⁵ / ₈ –1 ³ / ₄	2 ¹ / ₄ –2 ³ / ₈	
Measured in Millimeters						
Joint Width	6	9	13	19	25	
Recessed Below Surface	9	9	9 to 13	9 to 13	13+	
Sealant Thickness	6	6	6	9	13	
Backer Rod Diameter	9	13	16	22	32	
Total Joint Depth	25–29	29–32	32–35	41–45	57–60	

¹On road surfaces where grinding is planned at a later date, the sealant and backer rod should be installed so that sealant is approximately 3/8 inch (9.35 mm) below the road surface after grinding is complete. An additional small amount should be added to allow for surface imperfections on the bottom and to provide room for old sealant to pump up from below during rehabilitation work in the summer months.

